

MULTI RIBS (POLY-V) BELTS

(EPDM rubber production is available)

PRODUCT DESCRIPTION


D&D Poly -V Belts are ideally suited for high speed, and or high drive ratio applications that conventional V-Belts just can not handle. D&D Poly-V Belts offers smooth vibration-free performance in a single compact drive belt.

Well suited for applications such as appliances, outdoor power equipments, roller conveyors, machine tools, medical equipments and exercise equipments. Fiber Reinforced Ribs for excellent wear resistance, High modulus, low stretch tensile member for added strength and dependability, smooth running for minimal vibration at high speeds, up to 80% higher horsepower capacity than RMA standards, oil and heat resistance and statically conductive. We have sections are: (PH, PJ, PK, PM, PL available) PK SECTION MOSTLY USED IN AUTOMOTIVE APPLICATIONS

SECTIONS RANGE


Section	Pitch (s)	Height (h)	Length Range "inch"
PH	0,06"	0,11"	25-118"
PK*	0,14"	0,20"	25-236"
PJ	0,09"	0,15"	25-236"
PL	0,19"	0,35"	25-236"
PM	0,37"	0,57"	28"-150"


* AUTOMOTIVE APPLICATIONS

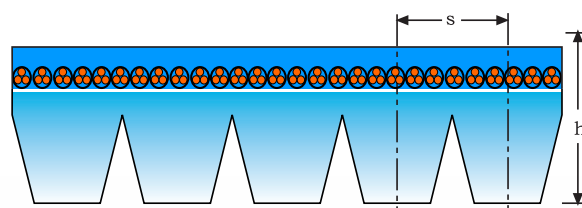

D&D POLY POWER*DRIVE	300 K
D&D POLY POWER*DRIVE	300 K
D&D POLY POWER*DRIVE	300 K

Profile section ←
Circumference Effective Length (Inch-Lp) ←

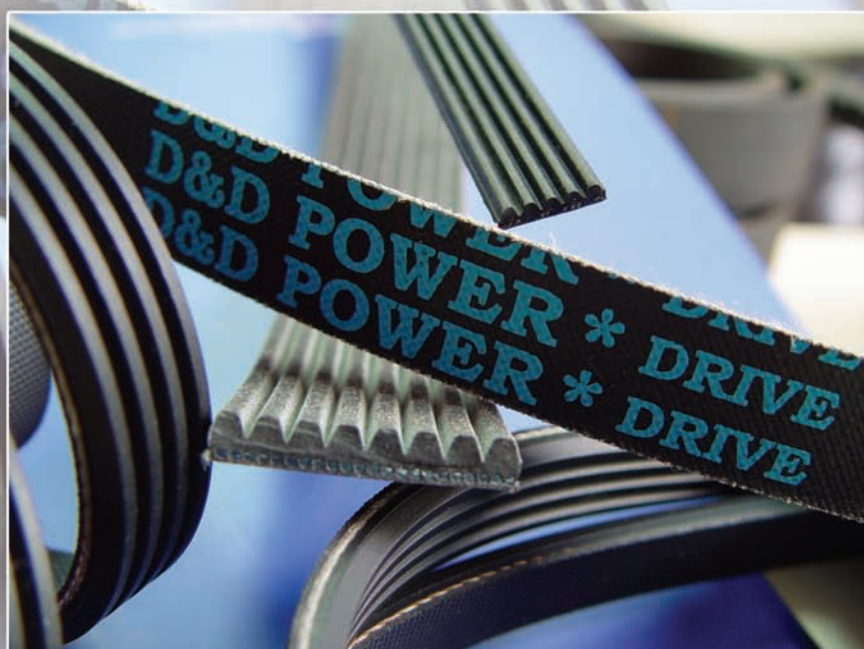




Pitch : 3,56 mm/0,14"
 Height: 4,5 mm/0,20"
 Angle: 40 degree
 Production range : Maximum 16 ribs / between 650 mm to 6000 mm

AUTOMOTIVE MULTI RIB/SERPENTINE POLY-V BELTS

Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code
195 K	PK 495	332 K	PK 843	432 K	PK 1097	540 K	PK 1372
200 K	PK 508	333 K	PK 846	433 K	PK 1100	545 K	PK 1384
215 K	PK 546	335 K	PK 851	434 K	PK 1102	550 K	PK 1397
220 K	PK 559	336 K	PK 853	435 K	PK 1105	551 K	PK 1400
233 K	PK 592	340 K	PK 864	436 K	PK 1107	553 K	PK 1405
235 K	PK 597	342 K	PK 869	438 K	PK 1113	555 K	PK 1410
236 K	PK 599	345 K	PK 876	440 K	PK 1118	558 K	PK 1417
237 K	PK 602	350 K	PK 889	441 K	PK 1120	560 K	PK 1422
238 K	PK 605	355 K	PK 902	445 K	PK 1130	570 K	PK 1448
240 K	PK 610	360 K	PK 914	446 K	PK 1133	580 K	PK 1473
243 K	PK 617	362 K	PK 919	450 K	PK 1143	590 K	PK 1499
245 K	PK 622	365 K	PK 927	451 K	PK 1146	595 K	PK 1511
248 K	PK 630	366 K	PK 930	455 K	PK 1156	600 K	PK 1524
250 K	PK 635	370 K	PK 940	457 K	PK 1161	610 K	PK 1549
252 K	PK 640	372 K	PK 945	460 K	PK 1168	620 K	PK 1575
267 K	PK 678	374 K	PK 950	465 K	PK 1181	625 K	PK 1588
268 K	PK 681	375 K	PK 953	470 K	PK 1194	630 K	PK 1600
270 K	PK 686	377 K	PK 958	474 K	PK 1204	640 K	PK 1626
272 K	PK 691	378 K	PK 960	475 K	PK 1207	650 K	PK 1651
273 K	PK 693	380 K	PK 965	477 K	PK 1212	700 K	PK 1778
275 K	PK 699	382 K	PK 970	478 K	PK 1214	710 K	PK 1803
280 K	PK 711	384 K	PK 975	480 K	PK 1219	750 K	PK 1905
281 K	PK 714	385 K	PK 978	485 K	PK 1232	800 K	PK 2032
283 K	PK 719	388 K	PK 986	490 K	PK 1245	830 K	PK 2108
285 K	PK 724	390 K	PK 991	495 K	PK 1257	840 K	PK 2134
288 K	PK 732	392 K	PK 996	496 K	PK 1260	850 K	PK 2159
290 K	PK 737	393 K	PK 998	500 K	PK 1270	925 K	PK 2350
292 K	PK 742	395 K	PK 1003	505 K	PK 1283	950 K	PK 2413
295 K	PK 749	396 K	PK 1006	510 K	PK 1295	975 K	PK 2477
300 K	PK 762	400 K	PK 1016	512 K	PK 1300	1000 K	PK 2540
305 K	PK 775	405 K	PK 1029	515 K	PK 1308	1005 K	PK 2553
310 K	PK 787	408 K	PK 1036	516 K	PK 1311	1009 K	PK 2562
315 K	PK 800	410 K	PK 1041	520 K	PK 1321	1010 K	PK 2565
317 K	PK 805	412 K	PK 1046	522 K	PK 1326	1015 K	PK 2578
319 K	PK 810	413 K	PK 1049	523 K	PK 1328	1020 K	PK 2591
320 K	PK 813	415 K	PK 1054	525 K	PK 1334	1025 K	PK 2604
323 K	PK 820	420 K	PK 1067	530 K	PK 1346	1030 K	PK 2616
325 K	PK 826	425 K	PK 1080	532 K	PK 1351	1031 K	PK 2618
327 K	PK 831	427 K	PK 1085	535 K	PK 1359	1055 K	PK 2680
328 K	PK 833	429 K	PK 1090	537 K	PK 1364	1150 K	PK 2832
330 K	PK 838	430 K	PK 1092	538 K	PK 1367	1367 K	PK 3470

"ASK FOR NON-LISTED ITEMS"



Pitch : 2,34 mm/0,09"


Height: 3,8mm/0,15"


Angle: 40 degree

Production range : Maximum 8 ribs / between 650 mm to 6000 mm

POLY V BELTS (J SECTION)

Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code
110 J	PJ 279	340 J	PJ 864	580 J	PJ 1473	890 J	PJ 2261
120 J	PJ 305	350 J	PJ 889	590 J	PJ 1499	900 J	PJ 2286
130 J	PJ 330	360 J	PJ 914	600 J	PJ 1524	910 J	PJ 2311
135 J	PJ 343	370 J	PJ 940	610 J	PJ 1549	920 J	PJ 2337
140 J	PJ 356	380 J	PJ 965	620 J	PJ 1575	930 J	PJ 2362
150 J	PJ 381	390 J	PJ 991	630 J	PJ 1600	940 J	PJ 2388
160 J	PJ 406	400 J	PJ 1016	640 J	PJ 1626	950 J	PJ 2413
170 J	PJ 432	410 J	PJ 1041	650 J	PJ 1651	960 J	PJ 2438
180 J	PJ 457	420 J	PJ 1067	660 J	PJ 1676	970 J	PJ 2464
185 J	PJ 470	430 J	PJ 1092	670 J	PJ 1702	980 J	PJ 2489
190 J	PJ 483	440 J	PJ 1118	680 J	PJ 1727	990 J	PJ 2515
200 J	PJ 508	450 J	PJ 1143	690 J	PJ 1753	1000 J	PJ 2540
210 J	PJ 533	460 J	PJ 1168	700 J	PJ 1778	1100 J	PJ 2083
220 J	PJ 559	470 J	PJ 1194	710 J	PJ 1803	1200 J	PJ 2184
230 J	PJ 584	480 J	PJ 1219	720 J	PJ 1829	1300 J	PJ 2210
240 J	PJ 610	490 J	PJ 1245	730 J	PJ 1854	1400 J	PJ 2235
250 J	PJ 635	500 J	PJ 1270	740 J	PJ 1880	1500 J	PJ 2261
260 J	PJ 660	510 J	PJ 1295	750 J	PJ 1905		
270 J	PJ 686	520 J	PJ 1321	760 J	PJ 1930		
280 J	PJ 711	525 J	PJ 1334	770 J	PJ 1956		
285 J	PJ 723	530 J	PJ 1346	780 J	PJ 1981		
290 J	PJ 737	540 J	PJ 1372	810 J	PJ 2057		
300 J	PJ 762	550 J	PJ 1397	820 J	PJ 2083		
310 J	PJ 787	560 J	PJ 1422	860 J	PJ 2184		
320 J	PJ 813	570 J	PJ 1448	870 J	PJ 2210		
330 J	PJ 838	575 J	PJ 1461	880 J	PJ 2235		

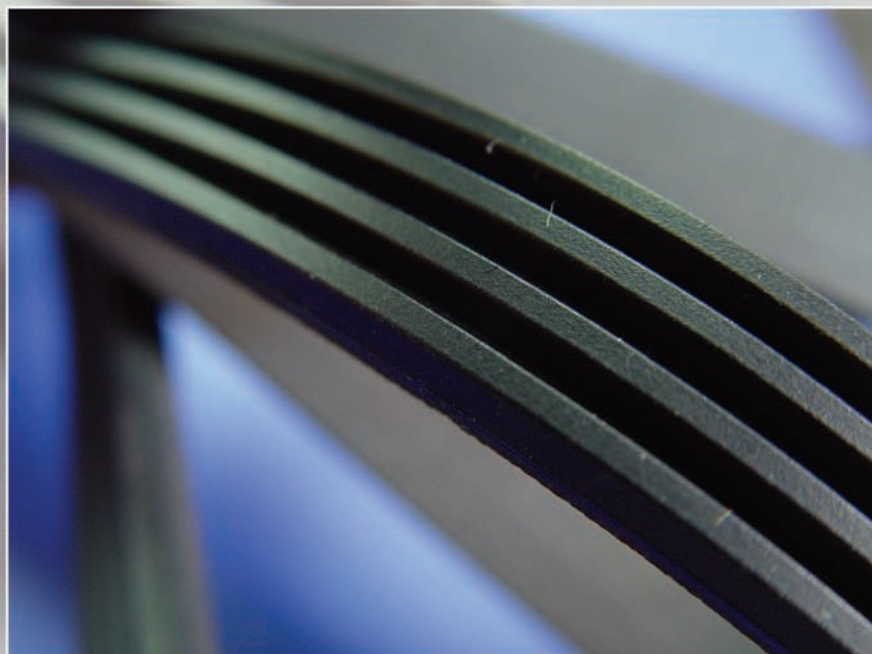



Pitch : 4,70 mm/0,19"

Height: 9 mm/0,35"


Angle: 40 degree

Production range : Maximum 8 ribs / between 650 mm to 6000 mm

POLY V BELTS (L SECTION)

Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code
375 L	PL 953	590 L	PL 1499	865 L	PL 2197	1420 L	PL 3607
390 L	PL 991	595 L	PL 1511	880 L	PL 2235	1455 L	PL 3696
410 L	PL 1041	615 L	PL 1562	915 L	PL 2324	1595 L	PL 4051
425 L	PL 1080	635 L	PL 1613	930 L	PL 2362	1650 L	PL 4191
460 L	PL 1168	650 L	PL 1651	975 L	PL 2477	1760 L	PL 4470
470 L	PL 1194	665 L	PL 1689	990 L	PL 2515	1820 L	PL 4623
480 L	PL 1219	670 L	PL 1702	1065 L	PL 2705	1980 L	PL 5029
500 L	PL 1270	680 L	PL 1727	1080 L	PL 2743		
510 L	PL 1295	695 L	PL 1765	1120 L	PL 2845		
520 L	PL 1321	710 L	PL 1803	1140 L	PL 2896		
525 L	PL 1334	725 L	PL 1842	1150 L	PL 2921		
530 L	PL 1346	765 L	PL 1943	1180 L	PL 2997		
540 L	PL 1372	770 L	PL 1956	1215 L	PL 3086		
550 L	PL 1397	780 L	PL 1981	1230 L	PL 3124		
560 L	PL 1422	795 L	PL 2019	1295 L	PL 3289		
565 L	PL 1435	815 L	PL 2070	1300 L	PL 3302		
580 L	PL 1473	825 L	PL 2096	1310 L	PL 3327		
585 L	PL 1486	840 L	PL 2134	1375 L	PL 3493		

"ASK FOR NON-LISTED ITEMS"



Pitch : 9,40 mm/0,37"

Height: 14,35 mm/0,57"

Angle: 40 degree

Production range : Maximum 20 ribs / between 1200 mm to 6000 mm

POLY V BELTS (M SECTION)

Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code	Belt Size	Metric Code
900 M	PM 2286	1310 M	PM 3327	1980 M	PM 5029	3610 M	PM 9169
940 M	PM 2388	1390 M	PM 3531	2130 M	PM 5410	3910 M	PM 9931
990 M	PM 2515	1470 M	PM 3734	2410 M	PM 6121	4210 M	PM 10693
1060 M	PM 2692	1550 M	PM 3937	2430 M	PM 6172	4540 M	PM 11532
1115 M	PM 2832	1610 M	PM 4089	2560 M	PM 6502	4810 M	PM 12217
1150 M	PM 2921	1650 M	PM 4191	2710 M	PM 6883	5410 M	PM 13741
1185 M	PM 3010	1760 M	PM 4470	3010 M	PM 7645	6010 M	PM 15265
1230 M	PM 3124	1830 M	PM 4648	3310 M	PM 8407		

"ASK FOR NON-LISTED ITEMS"